



PRODUCT BROCHURE




GRP GRATINGS & PROFILES

Glassfiber Reinforced Products

Chemical resistance chart of molded grating

Chemical	Max. Oper. Temp			
	%Conc.	Type 'vinyl'	Type 'Iso'	Type 'Ortho'
Hydrochloric acid	30	82	65	N/R
Nitric acid	35	38	N/R	N/R
Sulphuric acid	25	82	65	N/R
Hydrofluoric acid	10	24	N/R	N/R
Lactic acid	100	82	65	60
Hypochlorous acid	SAT	60	N/R	N/R
Citric acid	ALL	49	N/R	N/R
Potassium hydroxide	10	49	N/R	N/R
Sodium hydroxide	10	82	N/R	N/R
Calcium hydroxide	25	82	65	N/R
Calcium hypochloride	25	82	65	N/R
Ferric chloride	100	82	65	60
Aluminium chloride	ALL	82	65	60
Mercuric chloride	100	82	65	60
Silver nitrate	100	82	65	60
Sodium salt	ALL	24	N/R	N/R
Zinc chloride	ALL	24	24	N/R
Acetone	100	124	N/R	N/R
Chloroform	100	N/R	N/R	N/R
Fuel	All	38	38	38
Nantokite	ALL	82	65	60
Phenols	10	24	N/R	N/R
Ozone	ALL	38	38	38
Bleaching liquid	ALL	82	N/R	N/R
Ammonium hydroxide	30	24	N/R	N/R
Ammonium salt	ALL	24	N/R	N/R
Black sewage	ALL	82	N/R	N/R
Cupric oxide	ALL	52	52	N/R
Glycol	100	82	65	60
Sulfur dioxide	SAT	82	65	60
Sodium phosphate	50	82	N/R	N/R
Water	100	82	65	60
Alum	ALL	82	65	60
Chlorine water	SAT	49	N/R	N/R

ALL-concentrations SAT-saturated solution N/R- not recommended

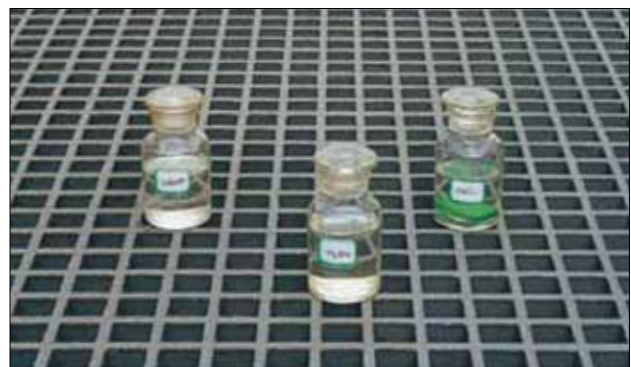



BFF Trading BV

Industriestraat 16, 1976 CV IJmuiden

PO Box 532, 1970 AM IJmuiden

The Netherlands

phone +31 (0)88 2102030

mail info@bfftrading.com

web www.bfftrading.com

Chamber of Commerce Haarlem: 52037169

VAT: NL850272762B01

PLEASE CONTACT US BY PHONE OR EMAIL FOR MORE INFORMATION OR A SAMPLE ORDER